

NEW

FULLY HYDRAULIC
BOOM

AK 37 X



Technical Specifications

Permissible gross vehicle weight [t]	7.49 / 8.6 (8.8)
Max. payload [kg]	1,500 (optional 3,000)
Max. extension length [m]	35 (optional 37)
Working height to the boom [m]	23.6
Extendable boom [m]	4.9 / 8.0 / 11.1 (optional 13.1)
Boom payload [kg]	1,500 / 800 / 500 / (250)
Telescopic boom angle [degrees]	85
Boom angle [degrees]	162
Swingrange [degrees]	+/- 315
Hook speed [m/min]	45
Reach in crane mode at 250 kg [m]	27.0 (optional 28.0)
Reach in crane mode at 500 kg [m]	20.5 (21.0 / 450 kg)
Reach in crane mode at 1 t [m]	13.5
Reach in crane mode at 2 t [m]	8.0
Reach in crane mode at 3 t [m]	5.7
Max. reach / working height [m] with 200 kgs wing basket with rotating basket 250 kg (PK 250-D)	21.7 / 33.2 20.8 / 33.2
Drive	PTO auxiliary drive / 400 V hybrid / 230 V hybrid with battery / eReadyKit

Subject to technical changes. The values listed are maximum values.



The AK 37 X truck crane impresses with its exceptional maneuverability and power. Thanks to its fully hydraulic boom – which can be extended and retracted under load in two stages via color radio control – the crane can comfortably utilize its full outreach of 37 m in any situation. It also offers increased working height when operating with a work platform.

With payloads of up to 3 metric tons, the AK 37 is a true all-rounder for everyday construction site use. It can transport standard loads of up to 250 kg a distance of up to 28 m, allowing it to reach even hard-to-access areas, such as the rear of roofs or building sides. Despite its impressive performance figures, this 7.49-metric-ton crane features a compact design that makes it particularly versatile in tight spaces – ideal for urban construction sites and demanding applications.

Optional features: Personnel Safety Mode


BöckerConnect

BöckerAirScanner


BöckerLiftPlanner

Böcker

Working range
crane operation


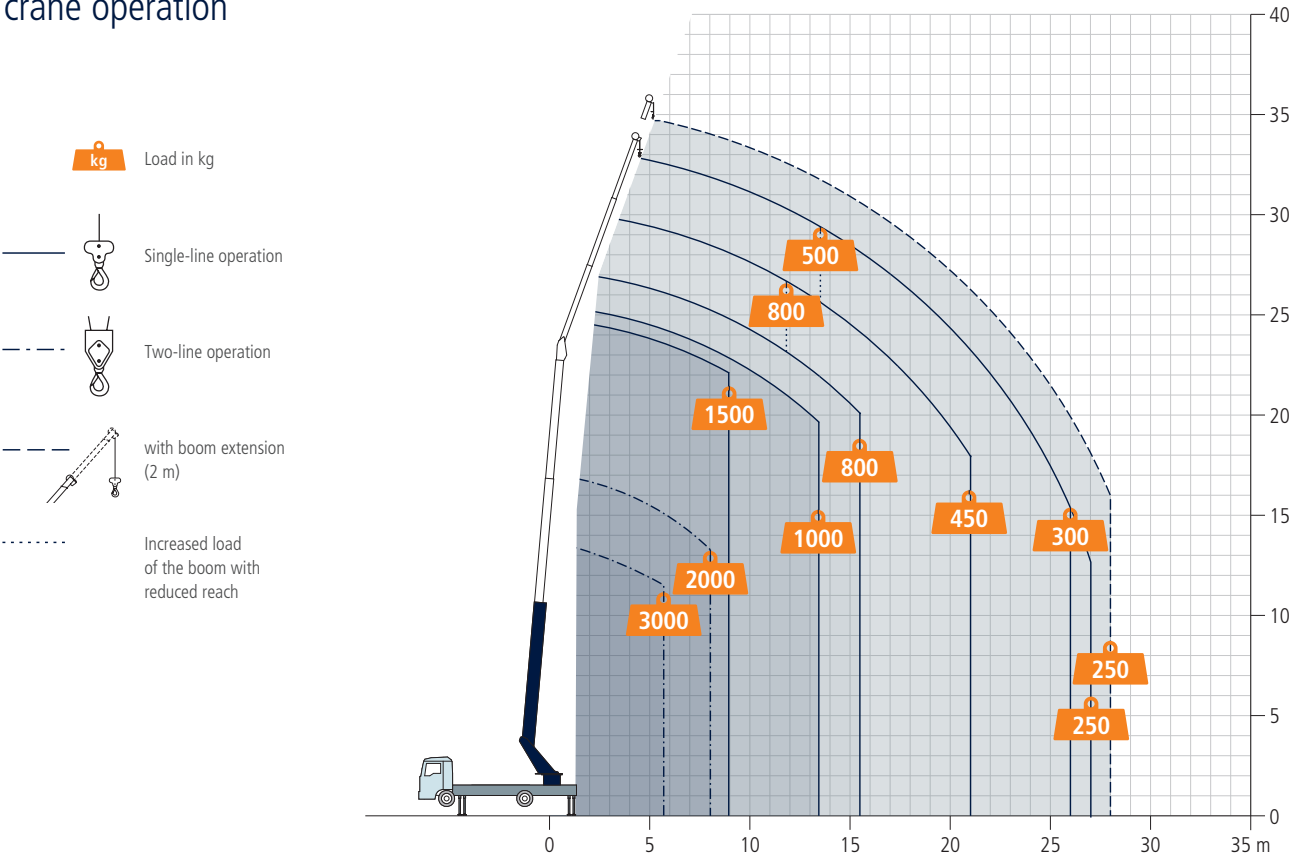


Working range
platform operation*

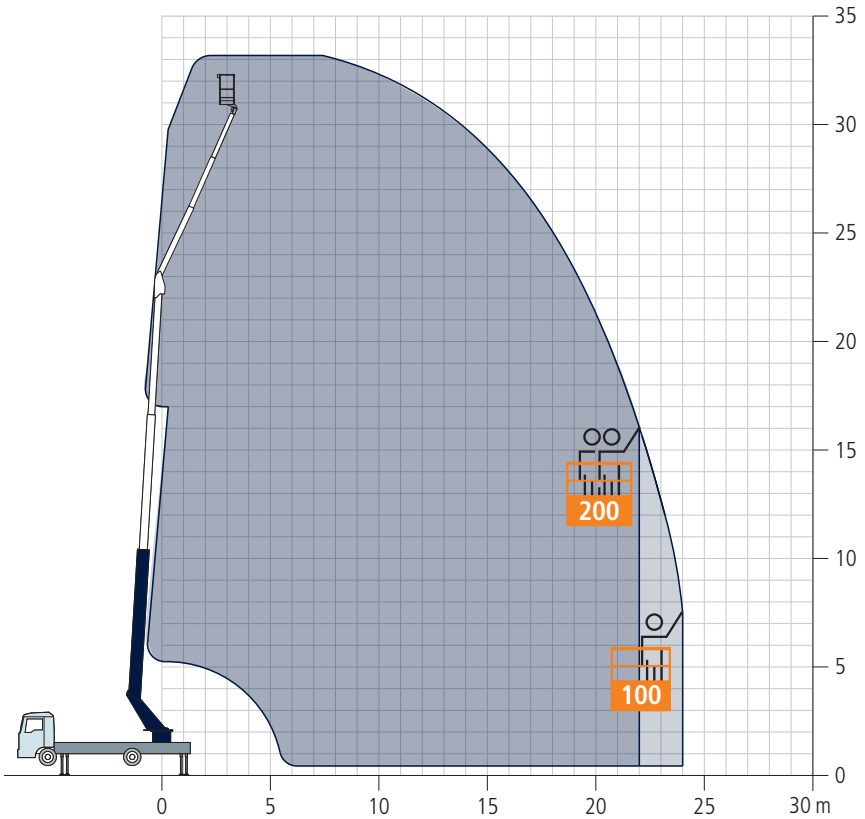

PK 250-D Ironing Basket, maximum load capacity of 200 kg

All weights are in kg.
Dimensions may vary slightly.
*Preliminary data

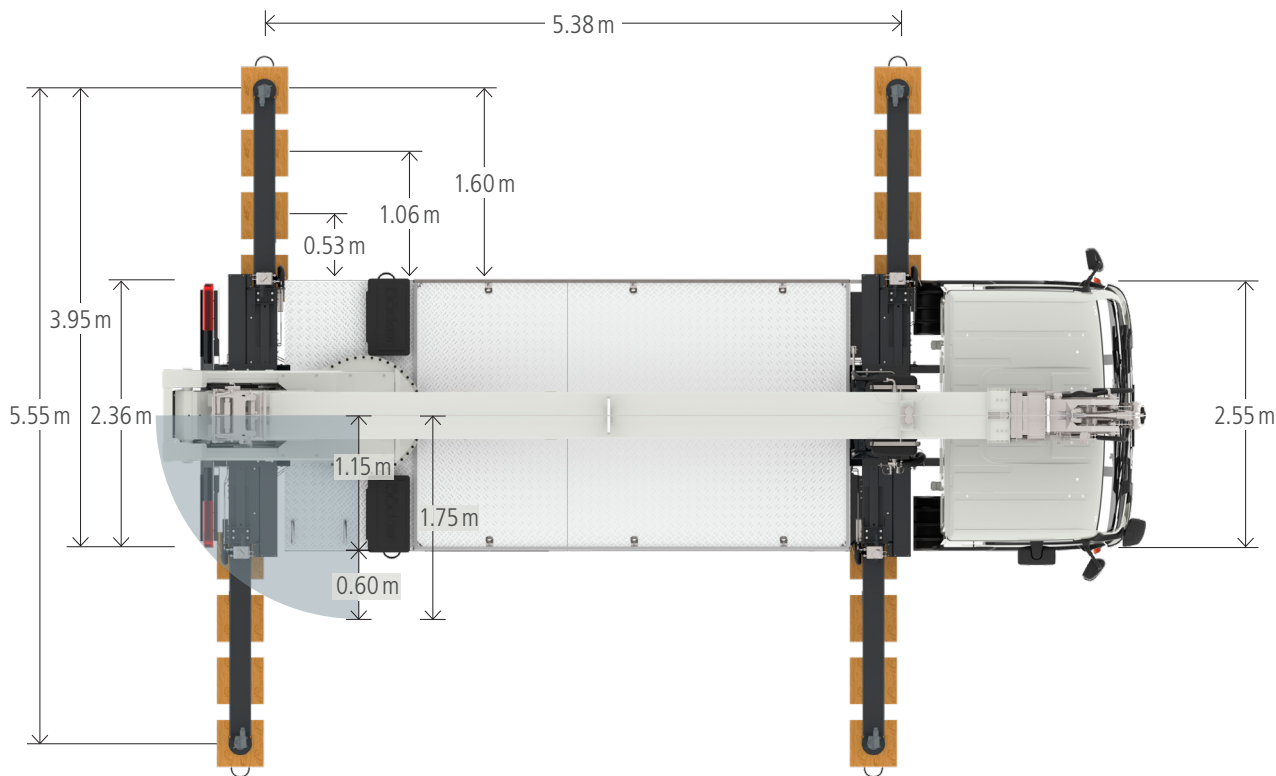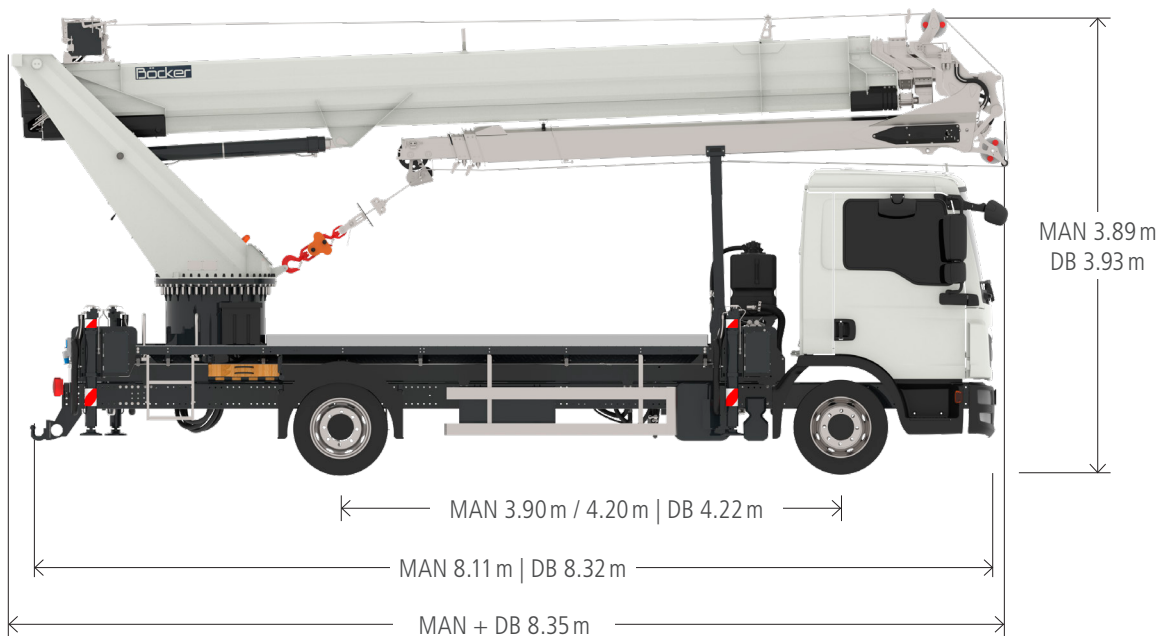

All weights are in kg.
Dimensions in meters may vary slightly.

Böcker

www.boecker.co.uk

Boecker UK Limited

Unit B Grazebrook Industrial Park
Hulbert Drive, Dudley
West Midlands UK-DY2 0XW

Fon +44 1384 476580
info@boecker.co.uk

Technical_Information_AK_37_X_ENUK_0726